

Fabrics by Enea

**www.eneadesign.com
www.exitfabrics.com
www.tuvatextil.com**

enea

www.eneadesign.com

in collaboration with

www.exitfabrics.com

www.tuvatextil.com

Paris/Gr.C by Enea Fabric

Paris - Product information

Technical information

Composition Surface/Backing
100% Polyester

Roll Width
140 cm (+/-3%)

Roll Length (average)
40/60m

Weight
520g/lm (+/-5%)

Tensile Strength
Warp 528N/31,6% EN ISO 13934-1
Weft 504N/14,2% EN ISO 13934-1

Tear Growth Resistance
Warp 42N EN ISO 13937-3
Weft 66,5N EN ISO 13937-3

Seam Slippage Resistance
Warp 2mm EN ISO 13936-2
Weft 2mm EN ISO 13936-2

Abrasion Test
>100.000 EN ISO 12947-1,2

Pilling
5 EN ISO 12945-2

Colour Fastness to Rubbing
5 DRY EN ISO 105-X12
5 WET EN ISO 105-X12

Colour Fastness to Artificial Light
5 EN ISO 105-B02

Applications & Features

Breathable

Fire Proof Norms

BS 5852 Part 1 - Cigarette Test - PASS
EN 1021-1 - Cigarette Test - PASS
CA Tech. Bull.117 / NFPA - Cigarette Test
- PASS

Enviroment

REACH Compliant
Confidence Textiles according to
OEKO-TEX Standard 100

Clean & Care recommendations


Frequent wash may affect the performance of the product.
To remove dust use a vacuum cleaner.
Any stain, spills or soiling should be cleaned up promptly with a neutral soap solution using a cloth in smooth circular movements.
Do not accept responsibility for any damage resulting from inappropriate use, chemical cleaning or additional impregnation.



EP001



EP004



EP005



EP007



EP008



EP009



EP010



EP011




EP012



EP013



EP014



EP016



EP017



EP018



EP019



EP021



EP022



EP023




EP024



EP025



EP026



EP027



EP028



EP029



EP031



EP032



EP033



EP034




EP035



EP036




EP037



EP039



EP040



EP041




EP045



EP046



EP047



EP052



EP053



EP056

Babel/Gr.C by Enea Fabric

Babel - Product information

Technical information

Composition Surface/Backing
100% Polyester

Roll Width
142 cm (+/-3%)

Roll Length (average)
40/45m

Weight
440g/lm (+/-5%)

Tensile Strength
Warp 1311N/33% EN ISO 13934-1
Weft 755N/27,4% EN ISO 13934-1

Tear Growth Resistance
Warp 162,4N EN ISO 13937-3
Weft 129,8N EN ISO 13937-3

Seam Slippage Resistance
Warp 3,5mm EN ISO 13936-2
Weft 4mm EN ISO 13936-2

Abrasion Test
90.000 EN ISO 12947-1,2

Pilling
3-4 EN ISO 12945-2

Colour Fastness to Rubbing
5 DRY EN ISO 105-X12
4-5 WET EN ISO 105-X12

Colour Fastness to Artificial Light
4 EN ISO 105-B02

Applications & Features

Breathable

Fire Proof Norms

BS 5852 Part 1 - Cigarette Test - PASS
EN 1021-1 - Cigarette Test - PASS
CA Tech. Bull.117 / NFPA - Cigarette Test
- PASS

Environment


REACH Compliant
Confidence Textiles according to
OEKO-TEX Standard 100

Clean & Care recommendations


Easy to Clean:
Promptly remove any excess liquid or
residue with a clean cloth.
Use a wet cloth with 5% neutral soap,
press gently and rub in circular move-
ments.
Recommend using a 100% cotton cloth
and a brush if necessary.
Frequent wash may affect the perfor-
mance of the treatment Easy to Clean.
The analytical results are referred only
to the sample tested.




EB002



EB004




EB005




EB006




EB011




EB026




EB032




EB038




EB040




EB041




EB042




EB043




EB044




EB046




EB048




EB049



EB054



EB055



EB057

Seattle/Gr.C by Enea Fabric

Seattle - Product information

Technical information

Composition Surface/Backing
100% Polyester

Roll Width
142 cm (+/-2%)

Roll Length (average)
40/45m

Weight
653g/lm (+/-5%)

Tensile Strength
Warp 2041N/48,7% EN ISO 13934-1
Weft 1057N/49,5% EN ISO 13934-1

Tear Growth Resistance
Warp 356,5N EN ISO 13937-3
Weft 297N EN ISO 13937-3

Seam Slippage Resistance
Warp 1,8mm EN ISO 13936-2
Weft 2mm EN ISO 13936-2

Abrasion Test
90.000 EN ISO 12947-1,2

Pilling
4 EN ISO 12945-2

Colour Fastness to Rubbing
5 DRY EN ISO 105-X12
4 WET EN ISO 105-X12

Colour Fastness to Artificial Light
5 EN ISO 105-B02

Applications & Features

Breathable

Fire Proof Norms

BS 5852 Part 1 - Cigarette Test - PASS
EN 1021-1 - Cigarette Test - PASS
CA Tech. Bull.117 / NFPA - Cigarette Test
- PASS

Environment

REACH Compliant
Confidence Textiles according to
OEKO-TEX Standard 100

Clean & Care recommendations

Easy to Clean:


Promptly remove any excess liquid or
residue with a clean cloth.

Use a wet cloth with 5% neutral soap,
press gently and rub in circular move-
ments.

Recommend using a 100% cotton cloth
and a brush if necessary.

Frequent wash may affect the perfor-
mance of the treatment Easy to Clean.


The analytical results are referred only
to the sample tested.

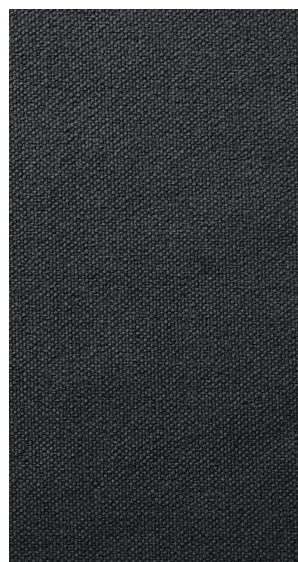


ES001



ES002



ES005




ES009




ES011




ES012




ES019



ES020



ES022




ES026




ES028




ES030



ES034




ES036



ES038




ES041




ES042



ES044




ES047



ES050



ES051



ES057

Plus F.R./Gr.C by Exitfabrics

Plus F.R. - Product information

With excellent fire resistance properties, Plus F.R. passes all the fireproof regulations required in the contract or office sectors (including SBI certification for construction products). A fabric with modern crepe binding made in polyester F.R. With a large colour range (up to 40 colours to choose from), it is a timeless classic from Exit Fabrics.

Technical information

Application

Leisure Contract Office Home

Composition

100% Polyester F.R.

Roll Width

140 cm (+/-2%)

Roll Length

45m (+/-10%)

Weight

455g/lm (+/-5%) / 325g/m2 (+/-5%)

Abrasion resistance

100.000 Martindale EN ISO 12947-2

Pilling

4-5EN ISO 12945-2 (1-5)

Colour Fastness to Light

5-6 EN ISO 105-B02 method 2 (1-8)

Colour Fastness to Rubbing

4 DRY EN ISO 105-X12

4 WET EN ISO 105-X12

Tear Resistance

Warp 81N EN ISO 13937-3

Weft 66N EN ISO 13937-3

Acoustic absorption

EN ISO 10534-2: 0.9

Flammability

BS 5852 O/1

BS 5852 CRIB 5

BS 7176 Medium Hazard

CAL TB 117 Sección 1

EN 1021 1/2

EN 13501-1 B-s1, d0

FAR 25.853 a) Apéndice F Part I (a) (1) (ii)

IMO MSC.307 (88) Anexo I Parte 8

NF D 60-013 AM 18

NF P92-507 M1

NFPA 260 Clase 1

Reglamento nº 118 de UNECE Anexo 6

UNE 23 727-90 1R Clase M.1

UNI 9175 Clase 1. IM

Maintenance

Vacuum regularly. In case of stains, use a damp cloth with neutral soap suitable for cleaning of upholstery products.

PLA004

PLA005

PLA009

PLA021

PLA030

PLA035

PLA045

PLA046

PLA069

PLA072

PLA074

PLA076

PLA077

PLA079

PLA081

PLA082

PLA084

PLA091

PLA094

PLA097

PLA100

PLA101

PLA102

PLA105

PLA106

PLA108

PLA141

PLA156

PLA157

PLA160

PLA161

PLA168

PLA172

PLA173

PLA174

PLF024

PLF136

PLF151

PLF158

PLF201

PLF292

Londres F.R./Gr.C by Exitfabrics

Londres F.R. - Product information

Open-weave fabric with flat binding.
Fire-resistant as standard (polyester F.R.), its woollen touch makes it appropriate for surfaces of all kinds, whether horizontal or vertical.

Technical information

Application

Contract Office Home Leisure

Composition

100% Polyester F.R.

Roll Width

140 cm (+/-2%)

Roll Length

45m (+/-10%)

Weight

402g/lm (+/-5%) / 287g/m² (+/-5%)

Abrasion resistance

100.000 Martindale EN ISO 12947-2

Pilling

4 EN ISO 12945-2 (1-5)

Colour Fastness to Light

4-5 EN ISO 105-B02 method 2 (1-8)

Colour Fastness to Rubbing

4-5 DRY EN ISO 105-X12

4-5 WET EN ISO 105-X12

Tear Resistance

Warp 39N EN ISO 13937-3

Weft 37N EN ISO 13937-3

Acoustic absorption

EN ISO 10534-2: 0.9

Flammability

BS 5852 O/1

BS 5852 CRIB 5

BS 7176 Medium Hazard

CAL TB 117 Section 1

EN 1021 1/2

FAR 25.853 a) Appendix F Part I (a) (1) (ii)

IMO MSC.307 (88) Annex I Parte 8

NF D 60-013 AM 18

NF P92-507 M1

NFPA 260 Class 1


Regulation n° 118 de UNECE Annex 6

UNE 23 727-90 1R Class M.1

UNI 9175 1. IM

Maintenance

Vacuum regularly. In case of stains, use a damp cloth with neutral soap suitable for cleaning of upholstery products.

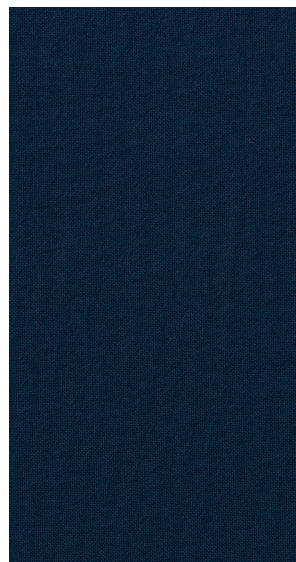

LN210



LN252




LN297



LN300



LN310



LN327




LN376



LN412



LN520



LN559




LN575



LN616




LN668



LN704



LN705



LN800

Stretch Plain F.R. /Gr.E by Exitfabrics

Stretch Plain F.R. - Product information

Stretch plain is a fire-resistant fabric with flat binding, and high performance with 140,000 Martindale cycles. It has multi-directional stretch properties allowing for excellent and comfortable upholstery. As well as offering an extensive and balanced palette of colours, it gives the option of customisation with a range of bespoke colours. And if that weren't enough, there is the possibility of combining its plain colour with the Vigoré finish of Stretch F.R. This collection has passed the SBI standard for construction products.

Technical information

Application

Leisure Contract Office Home

Composition

100% Polyester F.R.

Roll Width 140 cm (+/-2%)

Roll Length 40m (+/-10%)

Weight

530g/lm (+/-5%) / 380g/m2 (+/-5%)

Abrasion resistance

140.000 Martindale EN ISO 12947-2

Pilling

4-5 EN ISO 12945-2 (1-5)

Colour Fastness to Light

6 EN ISO 105-B02 method 2 (1-8)

Colour Fastness to Rubbing

4-5 DRY EN ISO 105-X12

4-5 WET EN ISO 105-X12

Tear Resistance

Warp 130N EN ISO 13937-3

Weft 120N EN ISO 13937-3

Acoustic absorption

EN ISO 10534-2: 0.9

Flammability

BS 5852 O/1

BS 5852 CRIB 5

BS 7176 Medium Hazard

CAL TB 117 Section 1

EN 1021 1/2

EN 13501-1 B-s1 d0

EN 13773 Class 1

FAR 25.853 a) Appendix F Part I (a) (1) (ii)

IMO MSC.307 (88) Annex I Parte 8

NF D 60-013 AM 18

NF P92-507 M1

NFPA 260 Class 1


Regulation n° 118 de UNECE Annex 6

UNE 23 727-90 1R Class M.1

UNI 9175 1. IM

Maintenance


Vacuum regularly. In case of stains, use a damp cloth with neutral soap suitable for cleaning of upholstery products.

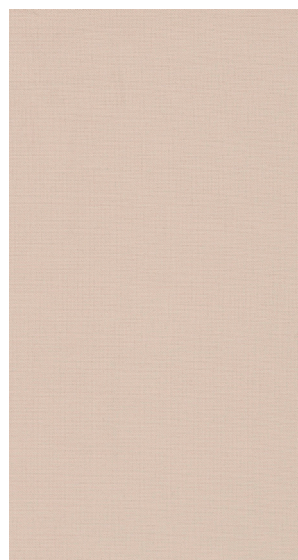


SP01




SP02



SP03



SP04



SP05




SP06




SP07



SP08



SP09



SP10



SP11




SP12



SP13



SP14




SP15




SP16



SP17




SP18



SP19




SP20




SP21



SP22



SP23



SP24



SP25



SP26



SP27



SP28



SP29




SP30



SP31



SP32



SP33

Agora Waterproof by Tuvatextil

Agora - Product information

High-end fabrics for decoration and upholstery that offer the best performance.

Tuvatextil has focused a major part of its research in recent years in the field of decorative fabrics, applying the latest advances in textile materials, methods and technologies.

Agora uses a 100% solution-dyed acrylic fibre throughout its range. Fabrics are manufactured to withstand the harshest conditions of the outdoors, incorporating a variety of qualities and treatments to cope with the most demanding environments and guaranteeing excellent performance. Agora is the IN & OUT solution.

Technical information

Application

Indoor/Outdoor/Nautic/Sunshades/Drapes/Cushions/Deskchairs/Frames

Composition

100% Solution Dyed Acrylic

Roll Width

160 cm

Roll Length

50ml

Weight

260gr/m²

Finish

Water repellent with stain resistant treatment

Light Fastness

7/8

Warranty

5 years

Tolerance

Sensitive values of tolerance of + / - 5%


Different optional fabric treatment:

WATERPROOF


FLAME RETARDANT

UNE 1021 PARTS 1-2 - IMO PEF 2010


Anex 1. Part 8 - BS 5852 Cigarette & Match

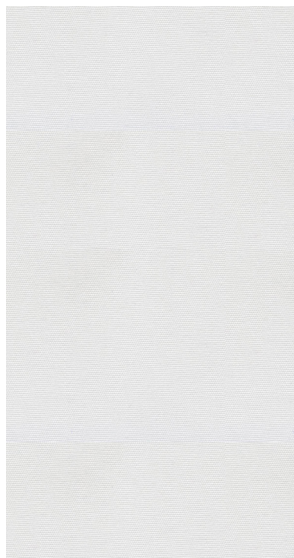

3701 Blanco

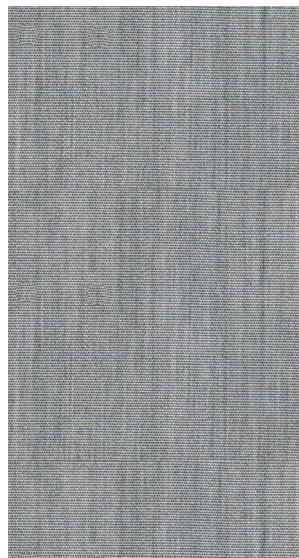


3825 Piedra

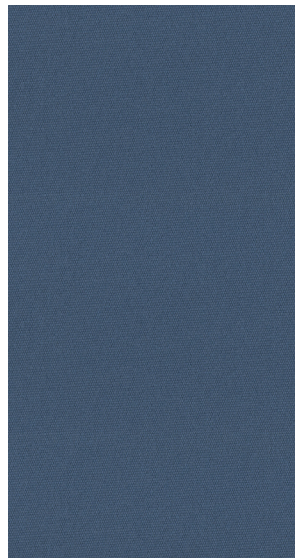

3736 Brisa



3731 Antracita

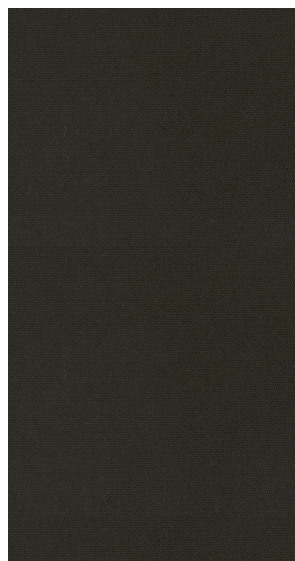

3713 Café


Double Mesh by Enea

Mesh - Product information

Double technical Mesh for Office and Contract.

The Mesh is very elastic and flexible for the confort for long term working requirements.

Available only for Back of the office chair.

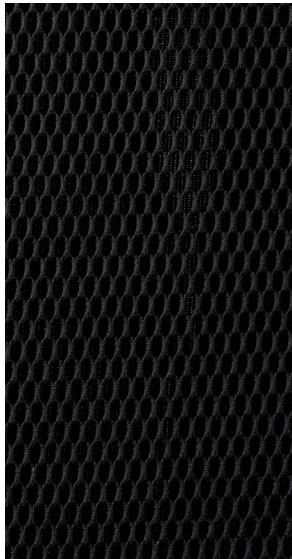

Black



Grey

Technical specifications: www.eneadesign.com

Please be aware that the PDF colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

www.eneadesign.com